

ACTION man

SEA WOLF

ASSEMBLY AND OPERATION INSTRUCTIONS



PUMP



2 DIVING
PLANES



CAMERA

FACE
MASK,
12" HOSE



RUDDER

PARTS



48" AIR LINE

METAL TUBE
CONNECTOR




LABELS

ASSEMBLY

RUDDER

- 1 Fit the two pins on the rudder over the two sockets on the black disc at the rear of the sub. (Illustration 1).

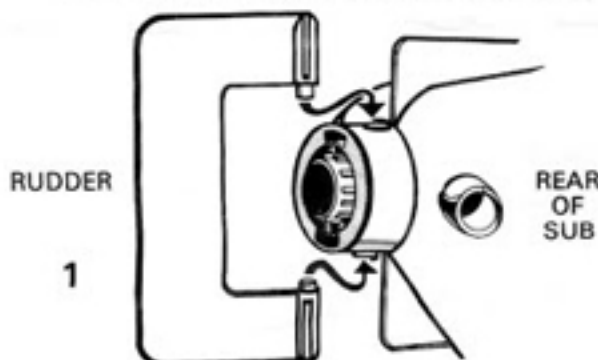

DIVING PLANES

- 2 Snap the diving planes into the receptacles on the sides of the rear of the Sea Wolf. Diving planes are interchangeable, but once fitted do not remove. They should remain in a horizontal position. (Illustration 2).



3




CAMERA

Push the pin on the camera into the socket on the pincer arms unit on the front of the sub. (Illustration 3).

4

PLACING ACTION MAN IN THE SUBMARINE

Open the conning tower by pushing the periscope towards the front of the sub, then pull the dome back (Illustrations 4a & 4b). Press one end of the hose over the pin on the right side of the seating area (Illustration 4c). Place Action Man in the seating area. Make sure that the brackets rest on top of Action Man's shoulders when the conning tower is closed (Illustration 4d). Fit the mask on his face and stretch the elastic behind his head to secure the mask. Close the conning tower, and slide the periscope back to engage the snap-lock.

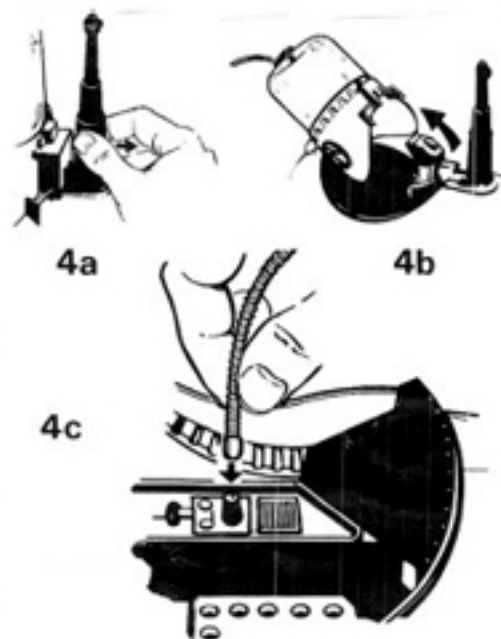

BRACKETS

4d




5 CONNECTING PUMP LINE TO SUB

Turn the valve cap on the conning tower to the side so that the air hole is exposed (Illustration 5a).

Important: If the valve cap is removed or lost the submarine will not operate.

Force the metal connecting tube into the hole at the front end of the air pump. Thread the air line through the rear or front eyelet on the sub body, then connect one end to the pump, and the other end to the conning tower connection (Illustration 5b).

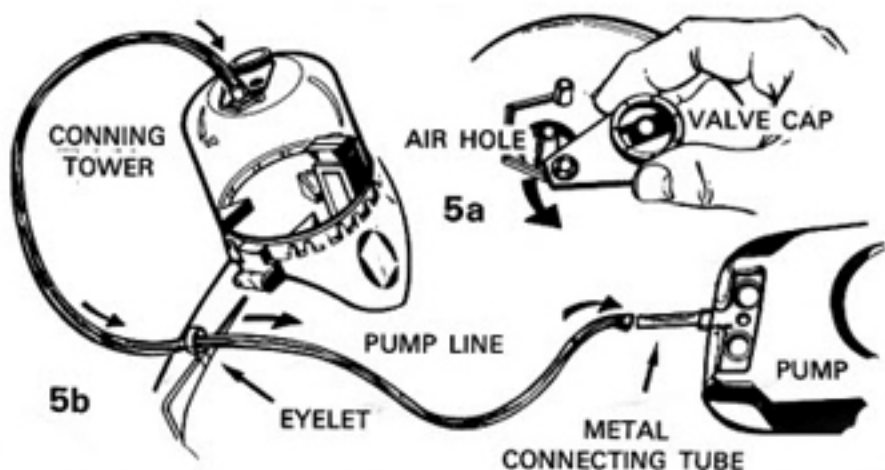


6 LABELS

Before you start navigating your Sea Wolf sub, you'll want to decorate the sub with the labels included. It's a good idea to ask an adult or older brother or sister to help you apply these labels.

Peel each label carefully from the sheet. Before you press the label down make sure it's positioned properly. Then smooth out the bubbles and wrinkles with your fingers.

Apply labels to both sides of the sub as illustrated (Illustration 6).

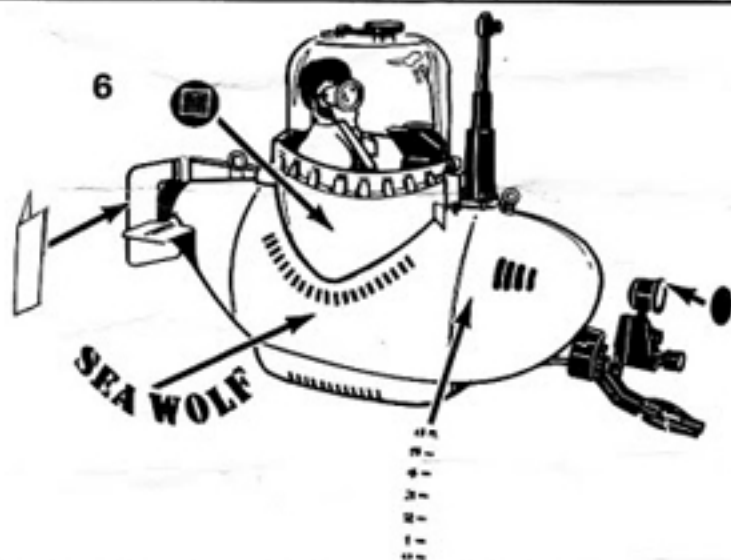

7 TO OPERATE THE PUMP




1. Plug the Down(DN) hole on the pump. Squeeze the pump to release the air from the sub, and the sub will descend (Illustrations 7a & 7b).

2. To make the sub surface, change the plug to the Up hole. Now pump air into the sub so that it will ascend.

3. To maintain buoyancy, do not use the plug. While holding your thumb over the Down hole, squeeze the pump to make the sub descend. Quickly, release the Down hole and cover the Up hole and squeeze the pump to make the sub ascend.

By alternately blocking the Up and Down holes with your thumb and squeezing the pump (Illustration 7c), the sub can be suspended in the water.

NOTE: To prevent siphoning water into the pump, do not leave the pump in a position below the water level. If you do make sure the Up hole is plugged.

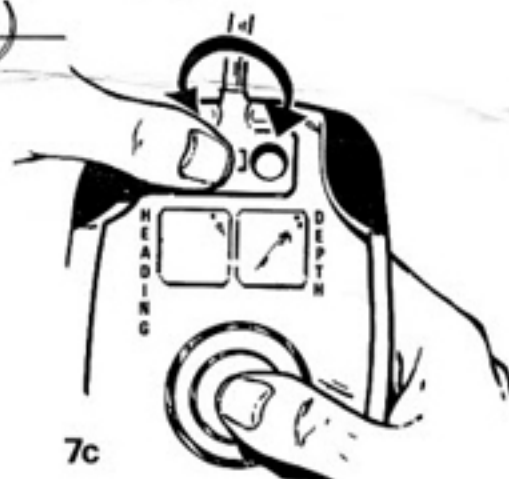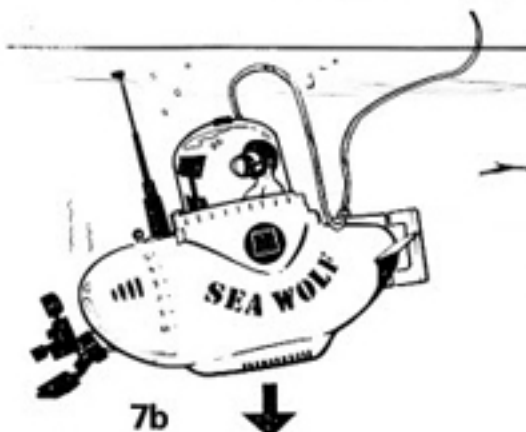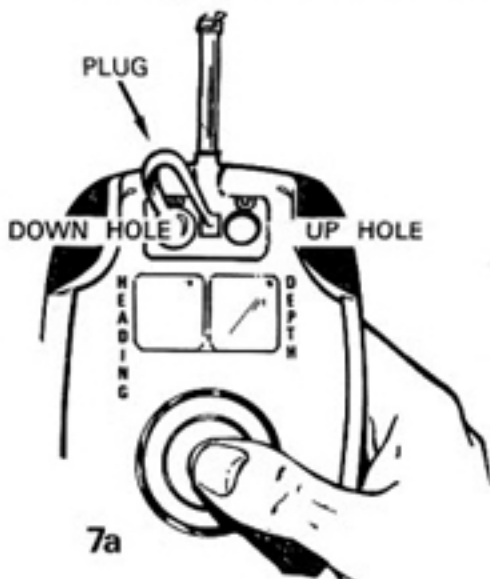

NOTE: SINCE THE ACTION MAN SUBMARINE IS A WATER TOY, AND IS CAPABLE OF DIVING TO DEPTHS FOUR FEET BELOW THE WATER'S SURFACE, ADULT SUPERVISION IS RECOMMENDED DURING PLAY.

Palitoy