

ADVENTURE TEAM
G.I. JOE
 FANTASTIC
SEA WOLF™



**ASSEMBLY AND
 OPERATION INSTRUCTIONS**




NOTE: SINCE THE G.I. JOE SUBMARINE IS A WATER TOY, AND IS CAPABLE OF DIVING TO DEPTHS FOUR FEET BELOW THE WATER'S SURFACE, ADULT SUPERVISION IS RECOMMENDED DURING PLAY.

IMPORTANT: The Taking G.I. Joe figure should not be used in the submarine.


ASSEMBLY

1 RUDDER
 Fit the two pins on the rudder over the two sockets on the back disc at the rear of the sub. (Illustration #1).

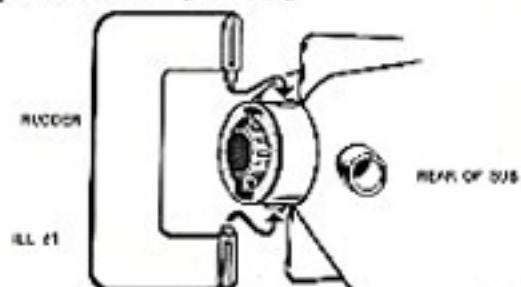

ILL #1

2 DIVING FLANGES
 Snap the diving flanges into the receptacles on the sides of the rear of the Sea Wolf. Diving flanges are interchangeable. They should remain in a horizontal position. (Illustration #2).

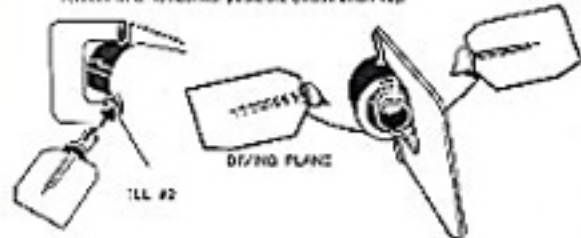

ILL #2

3 CAMERA
 Push the pin on the camera into the pocket on the prism arm unit on the front of the sub. (Illustration #3).



ILL #3

4 LABELS
 Before you start navigating your Sea Wolf sub, you'll want to decorate the sub with the labels included. It's a good idea to ask an adult or older brother or sister to help you apply these labels. Peel each label carefully from the sheet. Before you press the label down, make sure it's positioned properly. Then smooth out the bubbles and wrinkles with your fingers. Apply labels to both sides of the sub as illustrated. (Illustration #4).



ILL #4

5 PAGE MASK AND HOSE
 Open the conning tower by pushing the periscope towards the front of the sub, then pull the dome back. (Illustration #5a & #5b)
 Press one end of the hose over the pin on the right side of the viewing area. (Illustration #5c), then close the conning tower.




ILL #5a

ILL #5b

ILL #5c

6 CONNECTING PUMP LINE TO SUB
 Turn the valve cap on the conning tower to the side so that the air hole is exposed. (Illustration #6a)
Important: If the valve cap is removed or loose the submarine will not operate.
 Fit one end of the line over the metal tube. Thread the line through the rear or front eyelet, then connect the opposite end of the hose to the pump. (Illustration #6b)

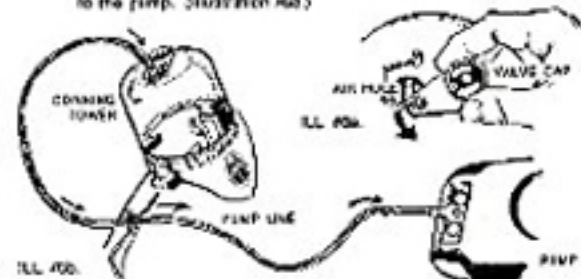

ILL #6a

ILL #6b

PUMP


7 PLACING G.I. JOE IN THE SUBMARINE
 Place G.I. Joe in the seating area. Make sure that the white brackets rest on top of Joe's shoulders when the conning tower is closed. (Illustration #7a)
 Fit the mark on his face and stretch the elastic behind his head to snug it to the mark.
 Close the conning tower, and slide the periscope back to engage the cross.




ILL #7a

TO OPERATE THE PUMP

1. Plug the Down (DN) port on the pump. Squeeze the pump several times to release the air from the sub. The sub will descend, as the periscope and instrument panel sink the top of the water. (Illustration #8a & #8b).
2. To make the sub surface, change the plug to the Up port. Now pump air into the sub so that it will ascend.

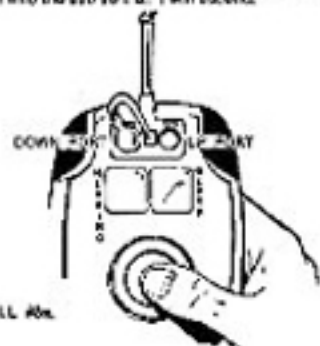

ILL #8a

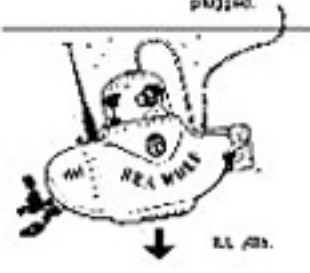

ILL #8b



ILL #8c

NOTE: To maintain buoyancy, do not use the air valve. While holding your thumb over the Down port, or after the pump to make the sub descend. Quickly release the Down port and cover the Up port and adjust the pump to make the sub ascend.

By alternately blocking the Up and Down ports with your thumbs and squeezing the pump, the sub can be suspended in the water. (Illustration #8c).


NOTE: To prevent splashing water into the pump, do not leave the pump in a position below the water level. If you do, make sure the Up port is plugged.

ADJUSTABLE UNDERWATER VIEWER

1. Snap the pontoons into the tabs on the underwater viewer as illustrated. (Illustration #9a & #9b).
2. Float the viewer on the surface of the water.
3. Look into the viewer. Turn the knob to rotate the mirror until you have the best view in view. (Illustration #9c).



ILL #9a

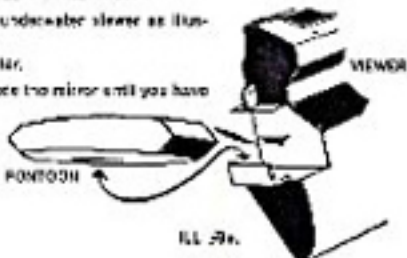

ILL #9b



ILL #9c